LINE PRO HP9116C 6KVA

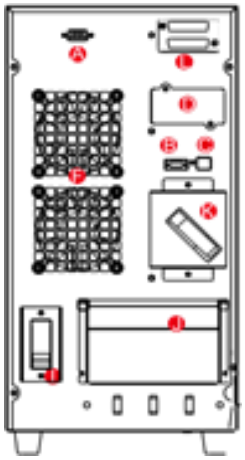

- A Communication Port
- B EPO
- C USB Port
- D Intelligent Slot
- E External Battery (For Long Backup Time UPS Only)
- F Cooling Fan
- G Input Plug
- H Output Socket
- I Input Breaker
- J Terminal Blocks Cover
- K Maintenance switch
- L Parallel port

Model	LINEPRO HP9116C High Frequency
Rated Power	6KVA/5.4KW
Rated Voltage	220/230/240VAC
Rated Frequency	40/70 Hz
Voltage Range	120~275VAC (±3VAC)
THDi	50HZ: (46~54HZ); 60HZ:(56HZ~64HZ)
Power Factor	> 0.99
Output	
Voltage Regulation	220±1%VAC
Frequency Regulation	50/60 Hz±0.05Hz
Power Factor	0.9
Voltage Distortion	Linear load＜2% Non-linear load＜4%
Overload Capability	105%~125% for 1 min ； 125%~150% for 30s; >150% for 0.5 s
Current Crest Ratio	3:1
Transfer Time	0ms (AC mode→Battery mode)
Efficiency(on line mode)	90%
Battery	
DC Voltage	180 VDC
Recharge Time	5hrs to 90% of capacity
Recharge Current	1A
Display	
LCD	Display input/output Voltage, Frequency, Battery voltag, Battery capacity, Loading rate.
Communication	
Interface	Smart RS232, SNMP(Optional),USB (Optional)
Environment	
Operation Temperature	0~40℃
Humidity	0~90% (Non-condensing)
Storage Temperature	-25℃ - 55℃
Sea Level Elevation	＜1000m
Noise Level (1m)	＜55dB
Physics Characteristic	
Dimensions: Wx D x H)mm	248X500X616